




» 260B HARVESTER/ FELLER BUNCHER

TIER 4 FINAL - SPECIFICATIONS



Equipped with a smooth, responsive IQAN® hydraulic control system, the Barko® 260B Track Harvester/Feller Buncher delivers an optimal combination of strength and efficiency. Purpose built with engineering input from forestry professionals, the Barko 260B offers exceptional drawbar pull (1.13:1 ratio) and intuitive maintenance features for superior reliability.

SPECIFICATIONS

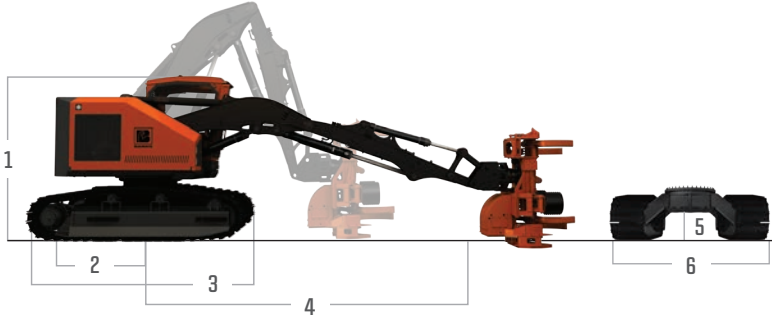


DIMENSIONS

1	Overall Height	11' 3" (343 cm)
2	Center to Rear of Counterweight	72" (183 cm) from swing center
3	Track Length	14' 3" (434 cm)
4	Boom Reach	21' 2" (645 cm) from attachment pin to swing center
5	Ground Clearance	29" (74 cm)
6	Overall Width	11' 1.5" (339 cm) with 700 mm pads
	Undercarriage Size/Pitch	D-7A, 8" (203 mm)
	Approx. Operating Weight	51,500 lbs (23,360 kg) without attachment

BOOM SWEEP

260B WITH FIXED OR FELLER HEAD

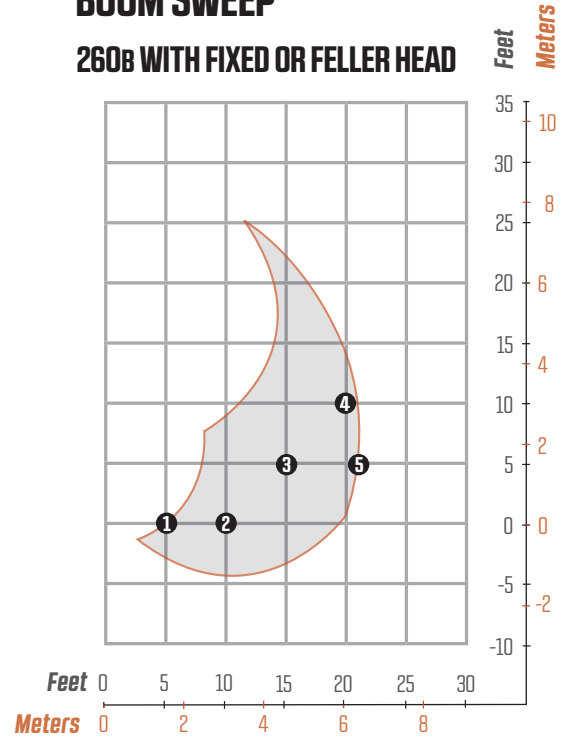

MAXIMUM FRONT LIFT CAPACITY

21' 2" (6.5 m) straight boom, less attachment.

	Radius	Lift		Radius	Lift
1	5' (1.5 m)	18,010 lbs (8,169 kg)	4	20' (6.1 m)	13,160 lbs (5,969 kg)
2	10' (3.0 m)	26,570 lbs (12,052 kg)	5	Full Reach	10,850 lbs (4,921 kg)
3	15' (4.6 m)	17,790 lbs (8,069 kg)			

TECHNICAL DATA

ENGINE

Model/Power	225 HP (168 kW) Cummins® QSB6.7 Tier 4 Final with SCR aftertreatment
Cooling Package	Fan 36" (914 mm) diameter reversible fan – pneumatically operated, IQAN® system controlled, engine driven
	Heat Exchanger 3 Cores – CAC, radiator & hydraulic. Pressure bypass integrated in system valve manifold for hydraulic cooler
DEF Tank	10 gal. (38 L)
Fuel Tank	125 gal. (473 L)


HYDRAULICS

System	IQAN: infinite variable control, individual operator settings, onboard diagnostics
Main Pump	Load sensing pressure compensated operating at 4,500 psi (310 bar)
Secondary Pump	Dedicated for head functionality
Tank	120 gal. (454 L)

PERFORMANCE

Maximum Tractive Effort	65,481 lbf (291.3 kN) (gross)
Drawbar Pull	1.13 to 1 ratio
Ground Pressure	8.25 psi (600 mm shoes)
	7.07 psi (700 mm shoes)
	6.19 psi (800 mm shoes)
	5.50 psi (900 mm shoes)
Maximum Travel Speed	2.1 mph (3.4 km/h) - High 1.2 mph (1.9 km/h) - Low
Swing System	Continuous rotation with dual swing drives
Swing Torque	50,787 ft-lbf at 3,770 psi (68,858 Nm at 260 bar)
Swing Bearing	Heavy-duty, oversized, 53.5" (1,359 mm) outside diameter

SPECIFICATIONS

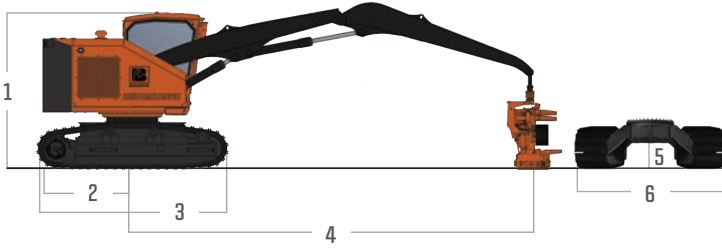


DIMENSIONS

1	Overall Height	11' 3" (343 cm)
2	Center to Rear of Counterweight	72" (183 cm) from swing center
3	Track Length	14' 3" (434 cm)
4	Boom Reach	27' 1" (826 cm) from attachment pin to swing center
5	Ground Clearance	29" (74 cm)
6	Overall Width	11' 1.5" (339 cm) with 700 mm pads
	Undercarriage Size/Pitch	D-7A, 8" (203 mm)
	Approx. Operating Weight	51,500 lbs (23,360 kg) without attachment

BOOM SWEEP

260B WITH DANGLE HEAD

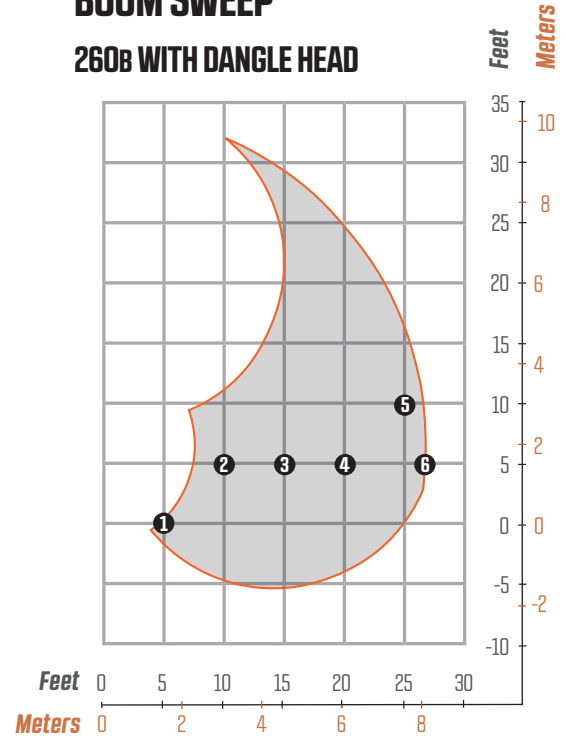

MAXIMUM FRONT LIFT CAPACITY

27' 1" (8.3 m) straight boom, less attachment.

	Radius	Lift		Radius	Lift
1	5' (1.5 m)	3,550 lbs (1,610 kg)	4	20' (6.1 m)	13,230 lbs (6,001 kg)
2	10' (3.0 m)	25,990 lbs (11,789 kg)	5	25' (7.6 m)	10,440 lbs (4,736 kg)
3	15' (4.6 m)	17,630 lbs (7,997 kg)	6	Full Reach	8,150 lbs (3,697 kg)

FEATURES & OPTIONS

OPERATOR CAB

Patent-pending forward-sliding design 1.25" (31.75 mm) polycarbonate with air knife system Oversized skylight, sliding rear window In-cab storage, cup holder, cell phone holder	Exterior LED lighting Heated air-ride seat Large access door AM/FM radio with MP3 auxiliary Dome light
---	--


STANDARD FEATURES

On-board air compressor with work tool capability Hydraulic tank vacuum pump	Tool storage areas under cab and track frames Electric fill pump
--	--

OPTIONS & ACCESSORIES

Barko CF18 and CF22 fixed harvesting heads Proheat®- engine, hydraulic and fuel tank heater DEM fixed, dangle and feller buncher heads High pressure hydraulic filter for attachments 6" lift cylinder for added capacity (Feller Buncher) AFEX® automatic fire suppression system Rear-view camera with 7" display	Droppen® herbicide stump spray system Various track shoe options in 600 mm, 700 mm, 800 mm & 900 mm widths SiriusXM® and Bluetooth radio Front window shade Envirosys® bar and chain grease system Counterweights from 1,000 lbs to 5,500 lbs *See complete listing of options at www.barko.com .
---	--

* Specifications are subject to change.

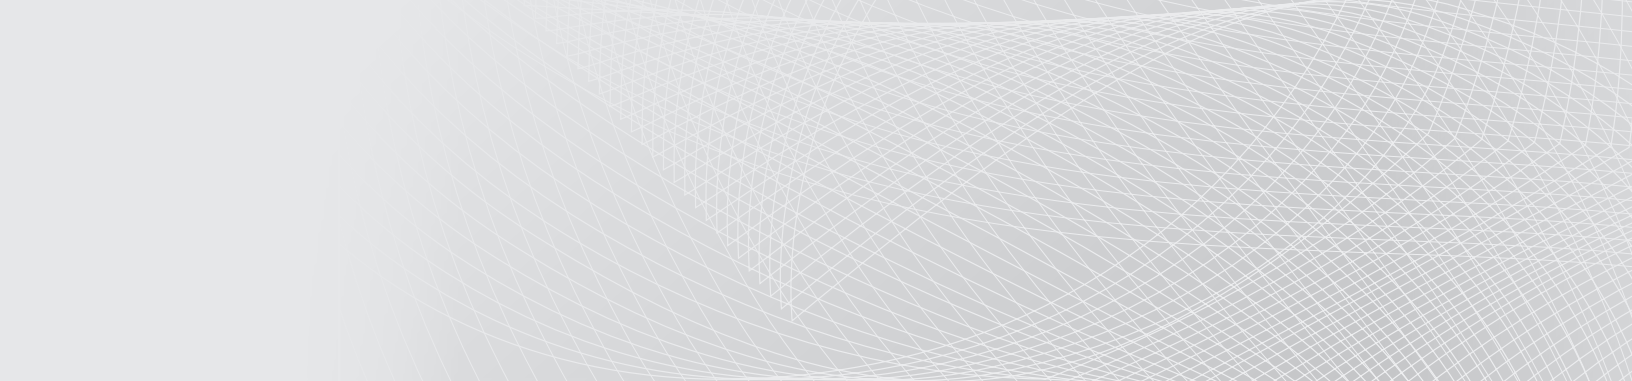

BARKO HYDRAULICS, LLC

One Banks Ave.
Superior, WI 54880

P: 715.395.6700
info@barko.com | www.barko.com

WARRANTY

	<i>1 Year</i>	Full machine
	<i>2 Years</i>	Powertrain and major hydraulic components
	<i>3 Years</i>	Machine structure